



MF 3000

MASS FLOW METER FOR SOLIDS



Compact and Economical In-Line Measurement – No Scale Required

Application and Function

The MF 3000 flow meter for solids is designed for measurements in metallic pipes ranging from pounds/h to tons/h. The system is suitable for on-line measurements of powders, dust, pellets, and granular ranging from 1 nm up to 20 mm (~1") particle size in pneumatic systems or free fall conditions.

The MF 3000 measurement principle is based on the physical Doppler effect, whereas the sensor generates a uniform electro-magnetic field in the microwave frequency range inside the pipe. Microwaves are being reflected by particles passing through the pipe. Calculation of frequency and amplitude changes allows for accurate determination of flow. Non-moving particles like dust accumulation are excluded from calculations.

Installation is simple and cost effective via a welding flange, through which the sensor is screwed in flush with the inside of the pipe.

The sensor is connected to a DIN-rail mounted transmitter via a 6 lead wire with a maximum distance of 1,200 m.

The transmitter features a RS 232 interface for set-up and calibration as well as analog 4...20 mA and digital RS485 output. Calibration is comfortable and easy with the included MF-SMART software and a reference flow amount.

A build-in heating cycle guarantees a stable environment which is essential for achieving high accuracy.



Benefits

- For pneumatic conveyors and freefalling processes
- IN-LINE measuring without weighing
- Easy installation and commissioning
- Contact less and integral measuring
- Inside flush fitting
- Adjustable sensitivity
- Long-term stability
- Robust, compact, and abrasion-free
- DIN-Rail Transmitter with COM-Interface for direct Online-connection
- Galvanic separated RS485-Interface for PLC-Connection
- MF-Sensor supply for connections up to 1.200 m
- Limit alarm monitoring with alarm contact



Applications

The MF 3000 mass flow meter is suitable for pneumatic systems and free falling processes. Diameter of the measured product should be between 1 nm and 20 mm (~1").

Moisture in the material can be up to 17%.

Materials:

all dust, powders, granules, panels, threads also sticking or abrasive materials

Range of detection:

from pounds/h to tons/h

Industries:

animal feed industry
building materials industry
production of ceramics
cement industry
chemical industry
detergent industry
engineering companies
food industry
glass production

metal production
pharmaceuticals
pigment production
plastic industry
production of rubber goods
recycling industry
synthetic materials
production of textiles
tobacco industry
detergent industry

Technical Data

Process Data

Measurement start free fall:
Measur. start pneum. transport:
Max. pipe diameter:
Grain size:
Moisture:
Pressure:
Temperature:

approx. 1 kg/h
approx. 1 kg/h
DN 300 (bigger diameter on request)
1 Nanometer up to 20 mm
depends on product
Up to 2 bar, optional up to 6 bar
-20 up to +95°C, optional up to +180°C

Electrical Data of evaluation unit:

Construction: DIN-Rail, 22.5mm
Power Supply: 24 V AC/DC
Power consumption: 3 W
Ambient temperature: -10 up to +65°C
Form of protection: IP 30
Output signal: 0/4-20 mA, Max. 750 Ohm, 0/2 – 10 Volt
Interfaces: RS 232, RS 485

Technical Data of sensor

Medium touched parts: Stainless steel 1.4307 and PA 6.6
Process connection: Welding flange
Housing material: Stainless steel 1.4307
Form of protection: IP 65
Power supply: max. 20mA

COMMISSIONING




A stainless steel welding flange is welded onto the pipe. A 18 mm hole is drilled right through the welding flange. The sensor is inserted and adjusted to be flush with the inner diameter of the pipe.


For set-up and calibration a notebook with our MF-SMART software is required. It connects to the front of the transmitter via a RS232 serial interface.

Calibration can be performed with either one or multiple reference flow amounts. Measurement values can be output either as analog 4...20mA or digital RS 485 signal for connection to a process control system.

TRANSMITTER

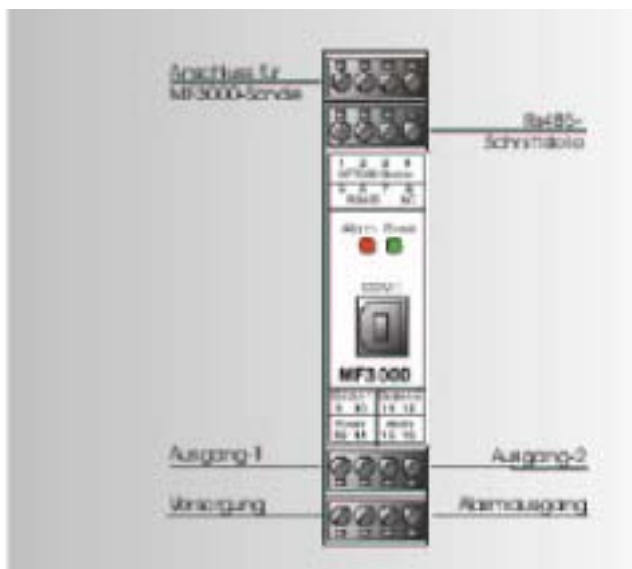

SENSOR

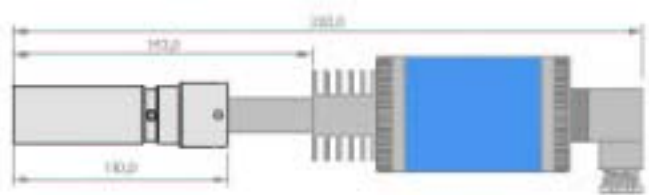

I.P.I. - International Products Inc.

1929 Poole Lane, McLean, VA 22101

ph: (703) 237-2774 fax: (703) 237-6687

sales@intproducts.com

www.intproducts.com